


PORTACUT

*PORTABLE GAS
CUTTING MACHINE*

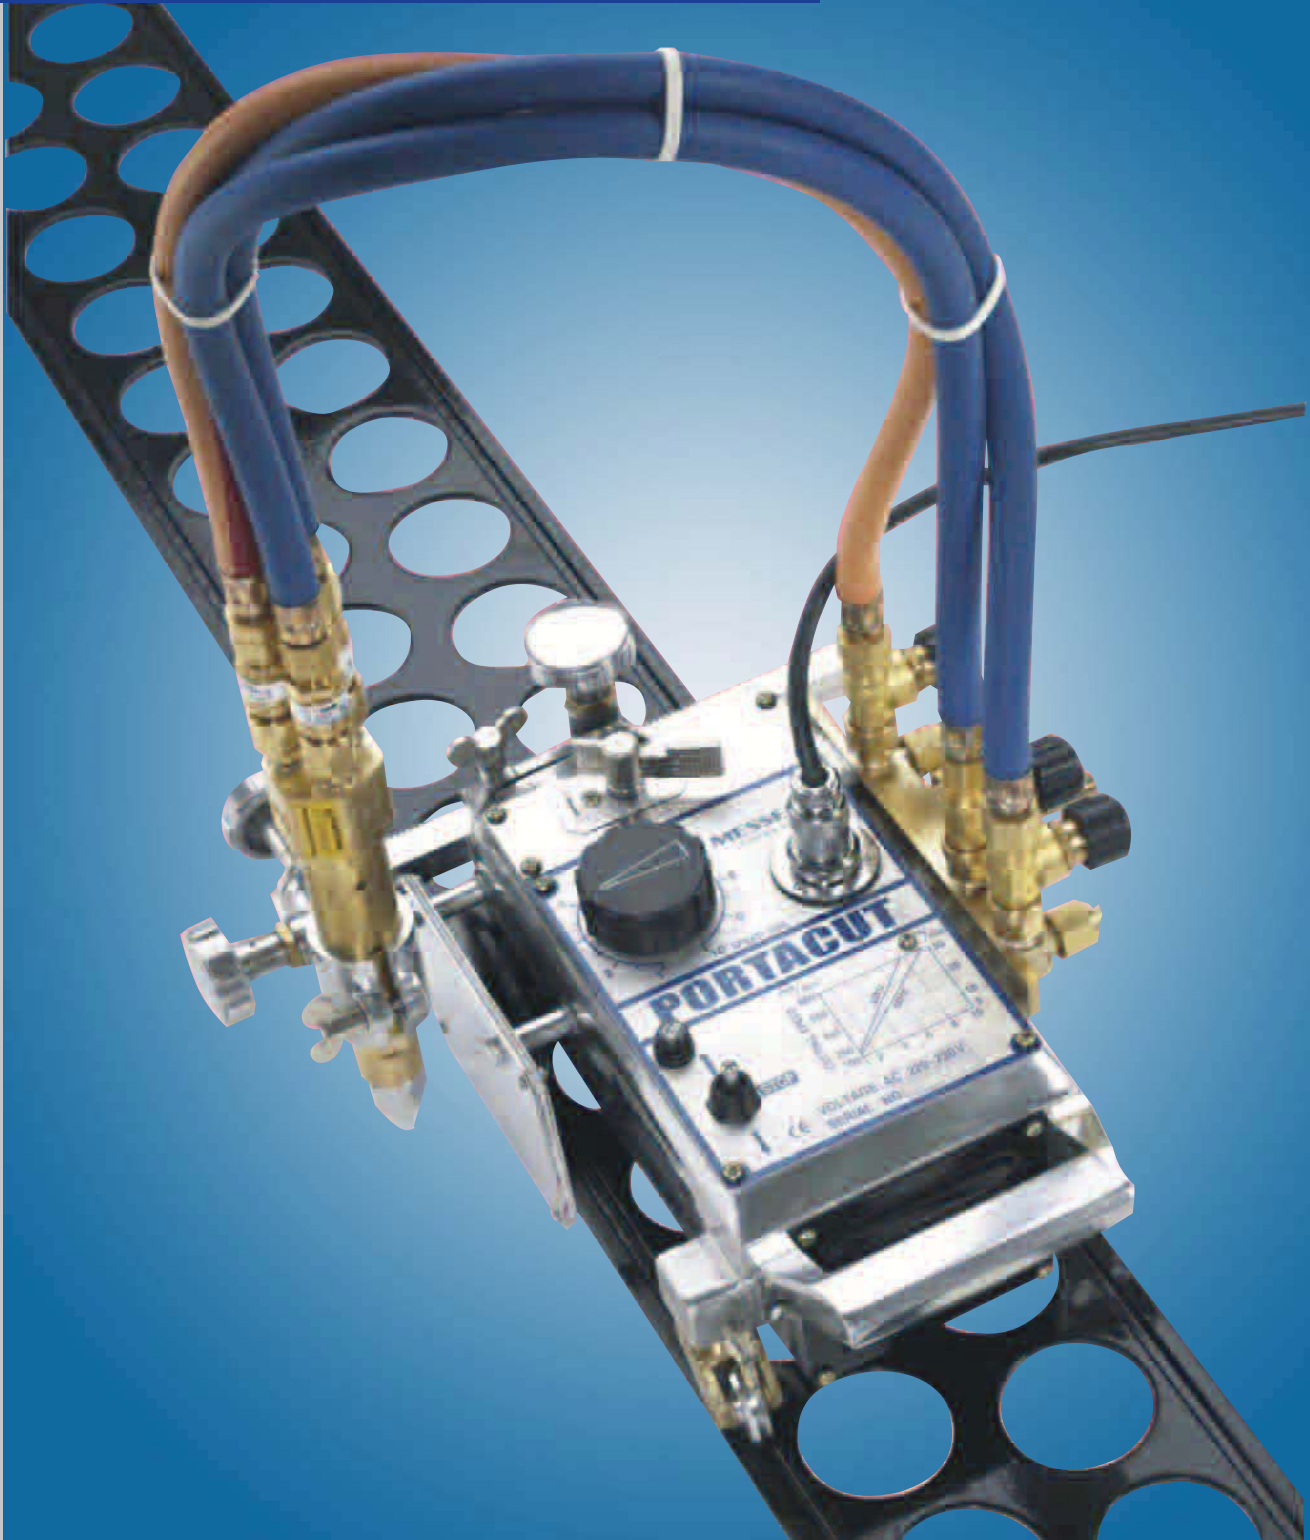

CUTTING MACHINE MULTI-PURPOSE TORCH SYSTEMS HAND CUTTING TORCHES MACHINE CUTTING TORCHES NOZZLES ACCESSORIES

**THE COMPACT MOTOR DRIVEN GAS CUTTING MACHINE
FOR STRAIGHT, CURVE, CIRCLE, BEVEL AND MULTI-BEVEL FLAME CUTS**

Portable automatic gas cutting machine *PORTACUT*

The low cost alternative for high quality value.



- For straight, curve, circle, bevel and multi-bevel cuts.
 - Functions control by forward/off/reverse switch, clutch lever and speed adjustment knob.
 - Power source: AC 230V, 50/60Hz
 - Motor: Condenser-induction, AC 230V, 10 W
 - Speed control: Single cone system.
 - Weight: 9,5 kg/20.9 lbs.
 - Cutting thickness: 3-300 mm
 - Cutting speed: 50-800 mm/min
 - Strip cutting range: 80-300mm
- ▶ PORTACUT machine without rail track, with one injector cutting torch for fuel gas acetylene: 716.51782
 - ▶ PORTACUT machine without rail track, with one injector cutting torch for fuel gas propane and natural gas: 716.51783
 - ▶ Portacut machine without rail track, with one nozzle-mix cutting torch for all fuel gases: 716.51784
 - ▶ Rail track with interlocking sections:
 - length 1200 mm / 47 inches: 716.51790
 - length 1800 mm / 71 inches: 716.52018
 - ▶ Injector machine cutting torch MSZ 832/110-A for fuel gas acetylene: 716.51787
 - ▶ Injector machine cutting torch MSZ 832/110-PMYF for fuel gas propane and natural gas: 716.51788
 - ▶ Nozzle-mix machine cutting torch MSIDZ 110-A/PMYF for all fuel gases: 716.51789
 - ▶ Adjusting valve for heating oxygen, G 1/4 RH: 718.00500
 - ▶ Adjusting valve for cutting oxygen, G 3/8 RH: 718.00501
 - ▶ Adjusting valve for fuel gas G 3/8 LH: 718.00502
 - ▶ Flashback arrestor for heating oxygen, G 1/4 RH: 0.463.389
 - ▶ Flashback arrestor for cutting oxygen, G 3/8 RH: 0.463.384
 - ▶ Flashback arrestor for fuel gas, G 3/8 LH: 0.463.388
 - ▶ Extended rack bar: 716.51791
 - ▶ Counter weight : 716.51792
 - ▶ Circle cutting attachment, diameter 30-2400mm / 1.2-96": 716.51793
 - ▶ Standard hose package, 730 mm: 716.51929
 - ▶ Extended hose package, 950 mm: 716.51930
 - ▶ Cross feed torch holder for strip and multi bevel cuts 716.51794

MESSER 
Cutting Systems

Edition 01/11
Subject to change without notice COM
© Messer Cutting Systems GmbH
® registered trademark of
Messer Cutting Systems GmbH
Oxyfuel Technology

Messer Cutting Systems GmbH
Oxyfuel Technology
Otto-Hahn Straße 2 - 4
D-64823 Groß-Umstadt Germany
Phone +49 6078 787-0
Fax +49 6078 787-150
E-mail: info@messer-cs.de
Internet: www.messer-cs.de

Your authorized Messer distributor:

